



**Europäisches  
Patentamt**

**European  
Patent Office**

**Office européen  
des brevets**

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

**Patentanmeldung Nr. Patent application No. Demande de brevet n°**

02102466.6

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**





Anmeldung Nr.:  
Application no.: 02102466.6  
Demande no:

Anmeldetag:  
Date of filing: 18.10.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

International Business Machines Corporation  
N w Orchard Road  
Armonk, NY 10504  
ETATS-UNIS D'AMERIQUE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Method and Device for Streaming a Media File Over a Distributed Information System

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

G06F15/16

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR



## D E S C R I P T I O N

Method and Device for Streaming a Media File Over a Distributed  
Information SystemBackground of the Invention

## 1. Field of the Invention

The present invention generally relates to transfer of digital information. Particularly, the present invention relates to a method and a device for streaming a media file over a distributed information system, such as the Internet, to a client computer running a browser application.

## 2. Description of the Related Art

Rich media data extends traditional computer data formats into more natural data formats for the interaction of humans and computers by incorporating images, motion pictures, voice, audio, and video. The distribution of new media data creates some new severe issues, namely the need for transferring a huge amount of data. In order to handle this, streaming of video and generally of media has been established in recent years.

Streaming video is a sequence of "moving images" that are sent in compressed form over the Internet and displayed by the viewer as they arrive. Streaming audio is a sequence of compressed sound segments for the same use. Streaming media is streaming video with sound. With streaming video or streaming media, a Web user does not have to wait to download a large file before seeing the video or hearing the sound. Instead, the media is sent in a continuous stream and is played as it arrives. The user needs a player, which is a special program that uncompresses and sends video data to the display and audio data

---

to speakers. A player can be either an integral part of a browser or downloaded from the software maker's Web site.

Major streaming video and streaming media technologies include RealSystem G2 from RealNetworks, Microsoft Windows Media Technologies, IBM Video charger/Video charger player and Apple quick time. The standard MPEG (Moving Picture Experts Group) compression algorithm may be used for video. Other approaches use proprietary algorithms. Present technology offers streaming audio at up to 96 Kbps and streaming video at up to 8 Mbps. However, for most Web users, the streaming video will be limited to the data rates of the connection, e.g., up to 128 Kbps with an ISDN connection.

Streaming video is usually sent from pre-recorded video files, but can be distributed as part of a live broadcast "feed." In a live broadcast, the video signal is converted into a compressed digital signal and transmitted from a special Web server that is able to do multicast, i.e., sending the same file to multiple users at the same time.

In today's electronic business environment, standard HTML (Hypertext Markup Language) browsers, i.e., programs allowing a person to read hypertext, are the dominating way to access information and applications in distributed information systems, such as the Internet. These browsers communicate to servers utilizing standard protocols like http (Hypertext Transfer Protocol) and ftp (File Transfer Protocol), whereby a server is a computer that provides some service for other computers connected to it via a network. The most common example is a file server that has a local disk and services requests from remote clients to read and write files on that disk.

The browser's behaviour is limited by the capabilities provided by a respective communication protocol, e.g., the ftp protocol

---

is optimized to tasks related to file up- and download, whereas the http protocol is designed to handle more complex requirements, such as the ability that files can contain references to other files whose selection will elicit additional transfer requests.

Within an http communication between the browser and a web server the MIME-Type (Multipurpose Internet Mail Extensions), which is being part of the http reply, allows the browser to determinate the kind of data currently receiving from the server.

With the information about the kind of data the browser is capable of doing more complicated tasks such as starting external applications and passing the received information to that applications. Nevertheless, the browser's capabilities are limited to the features provided by the supported protocols, such as the http protocol and the ftp protocol. Some protocols used for streaming, like RTSP (Real Time Streaming Protocol), have to fulfil other requirements, which are not available in a default web browser.

Two kinds of streaming have been established over time: HTTP Streaming transports media data over HTTP but is very limited when it comes to operations like forwarding or rewinding a stream. Therefore, it is mostly used with live feeds and low quality feeds. In opposition to this, "regular" streaming utilizes a special streaming protocol like RTSP which solves such protocol related restrictions. However, the latter requires the introduction of so called streaming meta data in order to enable browsers to start a web application that initiates the streaming. In general such meta data represent a link to rich media data content being hosted on a streaming server. A player, the meta data is being passed to, is able to connect to the

---

streaming server and request the rich media data stream for rendering.

The combination of player, streaming server and the format of the meta data used by the player to connect to a stream are usually kept proprietary by their manufacturers. In order to enable streaming of rich media files through different streaming servers and therefore to different players proprietary meta data for each player/server pair needs to be provided. In an environment in which millions of different rich media files are held for streaming preferably supporting more than one type of player, the effort for maintenance of the meta data files and web pages is enormous. It even grows, if environment changes like move/replace of stream server software get necessary.

In general, all web servers read http formatted requests from their network interface, process the request according to the rules defined by the http protocol and generates replies conform to the http protocol definition. More powerful web servers also support active pages like Java Servlets and CGIs (Common Gateway Interface). Java Servlets and CGIs are files containing executable code that is processed by the web server itself. Java Servlets and CGIs are identified by their path and/or their file extension. Parameters passed to the active page have to be attached to the page's URL like

[http://www.ibm.com/cgi-bin/service.pl?location=germany.](http://www.ibm.com/cgi-bin/service.pl?location=germany)

Larry Bouthillier, suggests in "Managing Dynamic Content for a Changing Web", 12.1999, (<http://www.newarchitectmag.com/archives/1999/12/bouthillier/>) a method for delivering streaming media. According to his proposal a video player URL (Uniform Resource Locator) called "play.jsp" is provided and offers users the ability to play any video file or segment and specify start and end times, if desired. According to one embodiment, a

---



hypothetical news organization's Webmaster could provide users with a link to a specific portion of the nightly newscast using a URL such as:

[http://www.ourtvnews.com/play.jsp?segment=dec01\\_1999\\_sports3](http://www.ourtvnews.com/play.jsp?segment=dec01_1999_sports3)

This URL accepts the segment, start or end parameters provided in the URL QUERY\_STRING and retrieves the data object for that segment. If start and end times are specified in the QUERY\_STRING, play.jsp will play the requested portion of the media file, overriding the start and end time information in the database. Next, it will select a server at random from a server list, and finally, assemble a metafile that will direct a media player, such as RealPlayer, to launch and connect to the server to play this video. The program sets the MIME-Type in the HTTP result (for example "audio/x-pn-realaudio") to tell the browser which video player to launch. By changing the MIME-Type, it can be determined, for example, whether RealPlayer is launched as a separate application or embedded in the Web page. At last the metafile is printed to the output stream, sending it through the Web server to the client, where RealPlayer will load it, subsequently analyse it and play the selected video by connecting to a streaming server. According to this approach access is achieved to respective videos and load balancing among the servers. The videos need to be in a database to be accessible via the Web. Simply adding records to the database may create new playable video segments.

#### Object of the Invention

Starting from this, the object of the present invention is to provide a method and a device for streaming a media file over a distributed information system, such as the Internet, to a client computer running a browser application.

---

Brief Summary of the Invention

The foregoing object is achieved by a method and a system as laid out in the independent claims. Further advantageous embodiments of the present invention are described in the sub claims and are taught in the following description.

According to the present invention a method and a device is provided for streaming a media file over a distributed information system to a client computer running a browser application. First, a server receives a request for a particular media file from the client computer. Then, the server provides a metafile, e.g., by dynamically generating the metafile or, alternatively, statically querying the metafile from a respective data storage, whereby said metafile contains information about the identification, location and format of the media file, and returns it back to the client computer. Advantageously, the server intercepts a download request for the actual media file and reinterprets the download request in a request for receiving a corresponding metafile. Thus, instead of returning the requested media file, a meta file is returned that allows immediate streaming of the requested media file without the need of waiting for the download to be finished.

In other words, according to the present invention meta data required for streaming a particular media file is dynamically created depending on, e.g., the file extension of the requested rich media file, the URL or any other portion thereof. Advantageously, only the media file and not one or more meta data files need to be referenced in the web page. Furthermore, the necessity to store and maintain meta files on the web server is removed. The subject matter of the present invention also allows changing the software environment, e.g., the version or type of a streaming product or the location of media files, the load of the servers, the load of the network, the location of

---

the client, the agreed quality of service with a minimum on effort or allows load balancing with minimum overhead. It advantageously allows the inclusion of large multi media backend systems by redirecting related web requests. By usage of the method and system according to the present invention, all these changes do not affect the setup of the web pages, i.e., the code specifying the layout and content of existing web pages do not need to be changed.

In contrary to the approach formulated by Larry Bouthillier, this invention allows static or active web pages to reference the media files directly instead of referencing an active page that is parameterised to target the media file, which means there is no longer any indication within static or active web pages that streaming technology is utilized at all anymore. This advantageously allows standard web publishing software to support referential integrity between web pages and media files even in case streaming technology is utilized.

The idea of the invention is to target standard HTTP requests for rich media files towards a component that is in the following referred to as "Opaque Streaming Meta Data Server" instead of a standard web server. For all HTTP requests fulfilling predefined filter criteria, the Opaque Meta Data server returns an appropriate MIME-Type and streaming meta data instead of the original media content. Filter criteria are being built up out of a list of media format file extensions that can be predefined or configurable.

Additionally, the Opaque Streaming Meta Data Server may be configured to return meta data for several different pairs of player/streaming server products. The Meta Data Generator's configuration determines all default assignments between a rich media file format and the appropriate stream server to use. In order to enable overriding of a default, an optional parameter

---

identifying the preferred Player may be appended to the request URL like

[http://www.ibm.com/rich\\_media/sample.mpg?player=VideoChargerPlayer](http://www.ibm.com/rich_media/sample.mpg?player=VideoChargerPlayer).

The Opaque Streaming Meta Data Server can be realised in one of two major ways. On one hand the streaming meta data may be generated on-the-fly. In this case a component called "Meta Data Generator" as described by Larry Bouthillier is utilized internally to generate the meta data to be returned on-the-fly. The Opaque Streaming Meta Data Server may be realized as a custom HTTP Server, or as a off-the-shelf web server that redirects all requests matching the filter criteria mentioned above to this Meta Data Generator, passing the URL of the file originally requested along as a parameter.

On the other hand, the streaming meta data may be queried from a data store. In this case a component called "Meta Data Query" is used internally that queries the meta data to be returned from a pre-filled data store. Again, the Opaque Streaming Meta Data Server can be realized as a standalone application or as a web server that redirects all requests matching the filter criteria mentioned above to this Meta Data Query, passing the URL of the file originally requested along as a parameter.

#### Brief Description of the Drawing

The above, as well as additional objectives, features and advantages of the present invention, will be apparent in the following detailed written description.

The novel features of the invention are set forth in the appended claims. The invention itself, however, as well as a preferred mode of use, further objectives, and advantages thereof, will best be understood by reference to the following

---

detailed description of an illustrative embodiment when read in conjunction with the accompanying drawing, wherein:

Fig. 1 shows a block diagram illustrating a system in which the subject matter of the present invention may be used and a device in accordance with the present invention.

#### Detailed Description of the Invention

With reference now to Fig. 1, there is depicted a block diagram illustrating a system 100 in which the subject matter of the present invention may be used and a device in accordance with the present invention.

The system 100 includes a web client 102, a metadata server 104 and a delivery server 106 mutually connected by a network (not shown). The web client 102 may be formed by a computer system, such as a personal computer, a laptop computer and a PDA (personal digital assistant), running an operating system like MS Windows by Microsoft Corporation, Palm OS by Palm Inc. or GNU/Linux. It comprises a web browser 122, a network interface 124 and multimedia player 126. Microsoft's Internet Explorer or the Netscape Navigator may form the web browser. An Ethernet Adapter running a TCP/IP stack may typically implement the network interface 124, whereas Real Network's RealPlayer or Microsoft's Media Player may form the multimedia player.

The metadata server 104 may be implemented in software and be based on a computer system, such as a personal computer, a laptop computer or a server computer. The computer system may be driven by an operating system like MS Windows or Linux. It includes an HTTP protocol handler 132 and a network interface 134. Additionally, it features either a metadata generator component 136 or a metadata query component 138 or both as illustrated by two dotted-line rectangles inside a solid line

block 141. An Ethernet Adapter running a TCP/IP stack may typically implement the network interface 134.

The HTTP protocol handler 132 reinterprets HTTP requests for media content in a way that it returns streaming metadata content instead. The metadata generator component 136 generates streaming metadata on the fly, whereas the metadata query component 138 queries pre-made metadata from an internal data store (not shown).

The delivery server 106 may be realized as a program running on a server computer. It takes care of streaming media content to the web client 102. It is acknowledged that in a production environment one metadata server and one delivery server may communicate to a plurality of web clients. Furthermore, one metadata server may cooperate with multiple delivery servers, e.g., in order to perform load balancing, or vice versa, it may even be advantageous that multiple metadata server cooperate with a plurality of delivery servers in order to serve a number of web clients.

A streaming server 144 and network interface 146 is included in the delivery server 106. A RealServer by Real Networks or Windows Media Services by Microsoft Corporation may form the streaming server 144. Typical network interfaces are for example Ethernet adapters running a TCP/IP stack.

The diagram according to Fig. 1 also illustrates the request flow that takes place when requesting to stream media content:

The web browser 122 composes an HTTP request for a particular media content file and sends it to the web client's network interface 124 (arrow 150). A user clicking an HTML document link may initiate this action. Alternatively a user may initiate this action by typing the request URL into the browsers URL input

---

field. Please note that the request URL points to the media file itself, and neither to a streaming metafile nor a CGI/Java Servlet program component.

The network interface 124 subsequently forwards the request to the counterpart network interface 134 on the metadata server 104 addressed in the HTTP request URL (arrow 152).

In response, the network interface 134 forwards the request to the HTTP protocol handler 132 that is registered to handle HTTP requests and to provide an appropriate response (arrow 154).

Usually, a HTTP protocol handler would answer an HTTP request either by returning the content of the resource requested (default HTTP behavior), or by executing the resource and forwarding it's reply (Java Servlets, CGI scripts). However, the HTTP protocol handler 132 according to the present invention reinterprets the HTTP request so that it returns streaming metadata instead. In order to do so, the HTTP protocol handler 132 requests metadata for the requested media resource either from the metadata generator 136 or from the metadata query component 138 (arrow 156), depending on the way the metadata server 104 is configured to generate/query streaming metadata for one or more known delivery servers 106.

The HTTP protocol handler may be realized as a standalone program or by utilizing a standard web server component like Apache that is fitted with a suitably configured URL redirector plug-in feature for forwarding the requests to the metadata generator 136 or metadata query component 138.

In case the metadata generator 136 was contacted, it generates streaming metadata on the fly based on known streaming server types and the type of the requested media resource, i.e., media file. In case the metadata query component 138 was contacted, it

queries existing metadata from an internal data store that associates media locations with pre-made streaming metadata. In both cases the resulting streaming metadata is returned to the HTTP protocol handler 132 (arrow 158). A MIME-Type suitable for the streaming metadata that is either also generated/queried or specified as configuration information is accompanying the returned streaming metadata.

The metadata generator 136 and metadata query component 138 may be realized as Java Servlets running in a J2EE (Java 2 Platform, Enterprise Edition) container like Tomcat (a Servlet container that is used in the official Reference Implementation for the Java Servlet and JavaServer Pages technologies) or CGI scripts.

The HTTP protocol handler 132 builds a HTTP response that contains the streaming metadata and the MIME-type mentioned above. Then, it returns the HTTP response to the network interface 134 (arrow 160).

Subsequently, the network interface 134 transfers the HTTP response to the network interface 124 on the web client 102 that initiated the request in the first place (arrow 162). Then, the network interface returns the HTTP response to the requesting web browser 122 (arrow 164).

The web browser 122 analyzes the MIME-type contained in the HTTP response and selects a suitable multimedia player 126 based on this information. It starts the multimedia player 126 and forwards the received streaming metadata information to it (arrow 166).

In return, the multimedia player 126 analyses the streaming metadata passed to it and extracts all relevant information, such as which streaming server to contact, which streaming protocol to use, which file to stream. Streaming protocols may

---



be RTSP, HTTP or proprietary protocols depending on the streaming technology provider. Then, the multimedia player 126 composes a streaming protocol request and sends it to the network interface 124 (arrow 168).

The network interface 124 sends the streaming protocol request to its counterpart on the delivery server 106, namely, the network interface 146 (arrow 170).

The network interface 146 on the delivery server 106 forwards the streaming protocol request to the streaming server 144 (arrow 172). Then, the streaming server 144 analyses the streaming protocol request, checks the availability and accessibility of the media file requested. In case the checks are not passed, it returns a streaming protocol response that indicates the media file cannot be streamed. In case the checks are passed, it returns a positive streaming protocol reply. Additionally, it starts sending data packets to the corresponding networks interface 146, usually using a real-time protocol like UDP (arrow 174).

The networks interface 146 of the delivery server 106 transfers the real-time protocol packets to the counterpart network interface 124 of the web client 102 (arrow 176). Subsequently, the network interface 124 of the web client 102 forwards real-time protocol packets to the multimedia player 126 (arrow 178).

The multimedia player 126 receives the real-time packets and renders their content as they arrive. Packets that don't arrive in order are not rendered in order to preserve the time-line of the multimedia content.

In a preferred embodiment the present invention may be combined with additional Technology.

The present invention may be combined with the subject matter of the pending US Patent Application, Appl. No. 09/803513, by Baumeister et al., filed March 9, 2001, "Method And System For streaming Media Data In Heterogeneous Environments." There is disclosed a new method and system for streaming media data in a heterogeneous network environment. Additionally to existing standard streaming products, e.g. standard Media Player and Stream Server, a *Stream Server Portal*, which controls a set of Stream Servers is provided. The Stream Server Portal offers a service called *prepareStreaming* to applications, which return the streaming meta data necessary to initiate streaming for given media instances. The use of the Stream Server Portal allows generating streaming meta data necessary to initiate streaming on the fly as part of executing a *prepareStreaming* request. This completely removes the need to store and maintain said streaming meta data and solves the problems associated with it. Furthermore, Stream Server Portal allows transferring media data to a stream server machine transparently as part of executing a *prepareStreaming* request. This removes the constraint of media data to be maintained on the same machine as the stream server software and solves the problems this creates for certain server platforms. The Stream Server Portal can minimize the additional network traffic by maintaining a cache of the media data already transferred. Finally, Stream Server Portal allows choosing among available stream servers (even from different makers) in order to stream a particular media as part of executing a *prepareStreaming* request. This removes the need for companies to decide for a proprietary stream server software, as the Stream Server Portal shields the application requiring streaming from knowing the specifics about, and from storing and maintaining streaming meta data.

The combination adds media distribution capabilities to the Opaque Streaming Metadata Generator. The idea is to replace the metadata generator 136 / metadata query 138 components with the

---

Media Request Broker described that selects a suitable stream server for each client request on the fly. The idea is that instead of generating / querying streaming metadata for delivery servers that are statically associated to media files, such a system is capable of dynamically selecting a suitable delivery server and return suitable metadata. In order to achieve this, such a system caches the media files on the delivery servers and utilize additional information for selection besides media format and streaming server type, like delivery server utilization and proximity between delivery server and Web Client.

Additionally, the present invention may be combined with the subject matter of the pending International Patent Application, Appl. No. WO/EP02/02947, by Gerd Breiter et al., filed March 16, 2002, "Method And Computer System For Selecting an Edge Server Computer." According to this, a computer system is provided comprising client, having a Web browser with a media player, a web application server, a content server, edge servers ES1 to ES4 and a media request broker. After the client has selected a media for streaming the media request broker makes a determination concerning an appropriate edge server to perform the streaming operation. This determination is made based on an extension of the client's http request made by the edge server and passed from the application server to the media request broker.

The combination of an Opaque Streaming Metadata Generator with both subject matters significantly improves the quality of distribution decisions made by the system by providing client locality information of a fine granularity to the stream server selection process described above. The client locality information is transparently added to the HTTP request (arrow 152 of Fig. 1) while the request passes a proxy server equipped

with the technology described in the International Patent Application.

Instead or in addition the present invention may be combined with the subject matter of the pending US Patent Application, Appl. No. 10/017951, by Baumeister et al., filed December 13, 2001, "Time Zone Difference Based Locality Estimation Between Web Clients and E-Business Servers." There is described a system and a method for optimizing network routing using the network topology. The method includes a user sending a request for information to a server. The server receives the request and sends to the user the requested information in addition to a client side program. The client program then reads and saves the local user time. The user then sends another request for information to the server. In this request is embedded the local user time saved by the client side program. A server side program residing on server then receives the request and the local user time. The server side program uses the local server time to determine the topological location of the user and the identity of the server that is best suited to handle the request by the user. Finally, the server forwards the request of the user to the identified server.

Compared to the aforementioned copending patent applications, the letter one delivers less granular client locality information but has the advantage of not requiring additional infrastructure.

Additionally, the present invention may be combined with the subject matter of the pending US Patent Application, Appl. No. 10/087723, by Peter Fischer et al., filed September 5, 2002, "A Method And A Bridge For Coupling A Server And A Client Of Different Object Types." According to this improvement the computer system has clients and servers of different object models, such as SOAP (Simple Object Access Protocol), CORBA

---

(Common Object Request Broker Architecture) and / or EJB (Enterprise JavaBeans). In order to connect a SOAP client to a CORBA or EJB server a bridge is used containing corresponding server and client components as well as a mapping component in order to map object and method requests of one type into another. This way distributed application services can be provided.

A combination minimizes latency times caused by synchronously transferring media content into stream server caches during client requests.

The invention above is usable on every server system that supports Web technology. The major advantage is the simplification of embedding streamable media into Web applications. A change of the streaming environment is achievable by changing the configuration of the technology described above instead of requiring adoptions of existing HTML pages. The need of creating, maintaining und understanding meta data is removed.

Primary utilizers of the technology described are service providers (xSPs) seeking independence from specific streaming server technology providers, corporate intranet departments with the same desire, and providers of rich media related technology such as Content Management systems, Enterprise Media Beans, etc.

The present invention can be realized in hardware, software, or a combination of hardware and software. Any kind of computer system - or other apparatus adapted for carrying out the methods described herein - is suited. A typical combination of hardware and software could be a general purpose computer system with a computer program that, when being loaded and executed, controls the computer system such that it carries out the methods described herein. The present invention can also be embedded in

a computer program product, which comprises all the features enabling the implementation of the methods described herein, and which - when loaded in a computer system - is able to carry out these methods.

Computer program means or computer program in the present context mean any expression, in any language, code or notation, of a set of instructions intended to cause a system having an information processing capability to perform a particular function either directly or after either or both of the following a) conversion to another language, code or notation; b) reproduction in a different material form.

Claims

1. A method for streaming a media file over a distributed information system to a client computer running a browser application, the method comprising the steps of:

receiving a request for a particular media file from a client computer,

providing a metafile, whereby said metafile contains information about the identification, location and format of the media file,

returning said metafile back to said client computer, characterized in that

the step of receiving a request for a particular media file from a client computer further comprises the step of

intercepting a download request for the actual media file and

reinterpreting said download request in a request for receiving a corresponding metafile.

2. The method according to claim 1, wherein the step of reinterpreting said download request includes the step of deriving information about said corresponding metafile from any portion of the URL.

3. The method according to claim 2, wherein said portion of the URL is the file extension of the requested media file.

4. The method according to one of the preceding claims, wherein the step of providing a metafile is one step of the following group of steps, dynamically generating a metafile, and statically querying a metafile.

5. The method according to one of the preceding claims, wherein the step of reinterpreting said download request

---

includes the step of checking predefined filter criteria determining of whether or not a metafile is to be returned instead of the requested media file.

6. The method according to one of the preceding claims, further comprising the steps of:

generating said corresponding metafile, and  
returning said corresponding metafile back to the requesting client.

7. The method according to claim 6, wherein the step of generating said corresponding metafile includes the step of retrieving information about the configuration of at least one item of the group: version of the streaming product, type of the streaming product, location of the media file, load of the servers, load of the network, location of the client, quality of service.

8. The method according to claim 6 or 7, wherein the step of generating said corresponding metafile includes the step of reading information about the client's preferred streaming format and forming a metafile in accordance with the client's preference.

9. A device for streaming a media file over a network having a network interface (134) for communicating to a web client (102),

an HTTP protocol handler (132) for handling HTTP requests and

means (141) for providing meta data for initiating the streaming of a media file,

whereby said meta data is returned to said web client (102) in response to a request for said media file.



10. The device according to claim 9, wherein the means (141) for providing metadata is formed by a metadata generator (136).
11. The device according to claim 9, wherein the means (141) for providing metadata is formed by a meta data query component (138).
12. The device according to one of the claims 9 to 11 configured to perform the method of one of the claims 1 to 8.
13. A computer program product stored on a computer usable medium, comprising computer readable program means for causing a computer to perform a method according to anyone of the preceding claims 1 to 8.

## A B S T R A C T

Method and Device for Streaming a Media File Over a Distributed  
Information System

According to the present invention a method and a device is provided for streaming a media file over a distributed information system to a client computer running a browser application. First, a server receives a request for a particular media file from the client computer. Then, the server dynamically generates a metafile, whereby said metafile contains information about the identification, location and format of the media file, and returns it back to the client computer. Advantageously, the server intercepts a download request for the actual media file and reinterprets the download request in a request for receiving a corresponding metafile. Thus, instead of returning the requested media file, a meta file is returned that allows immediate streaming of the requested media file without the need of waiting for the download to be finished. (Fig. 1)

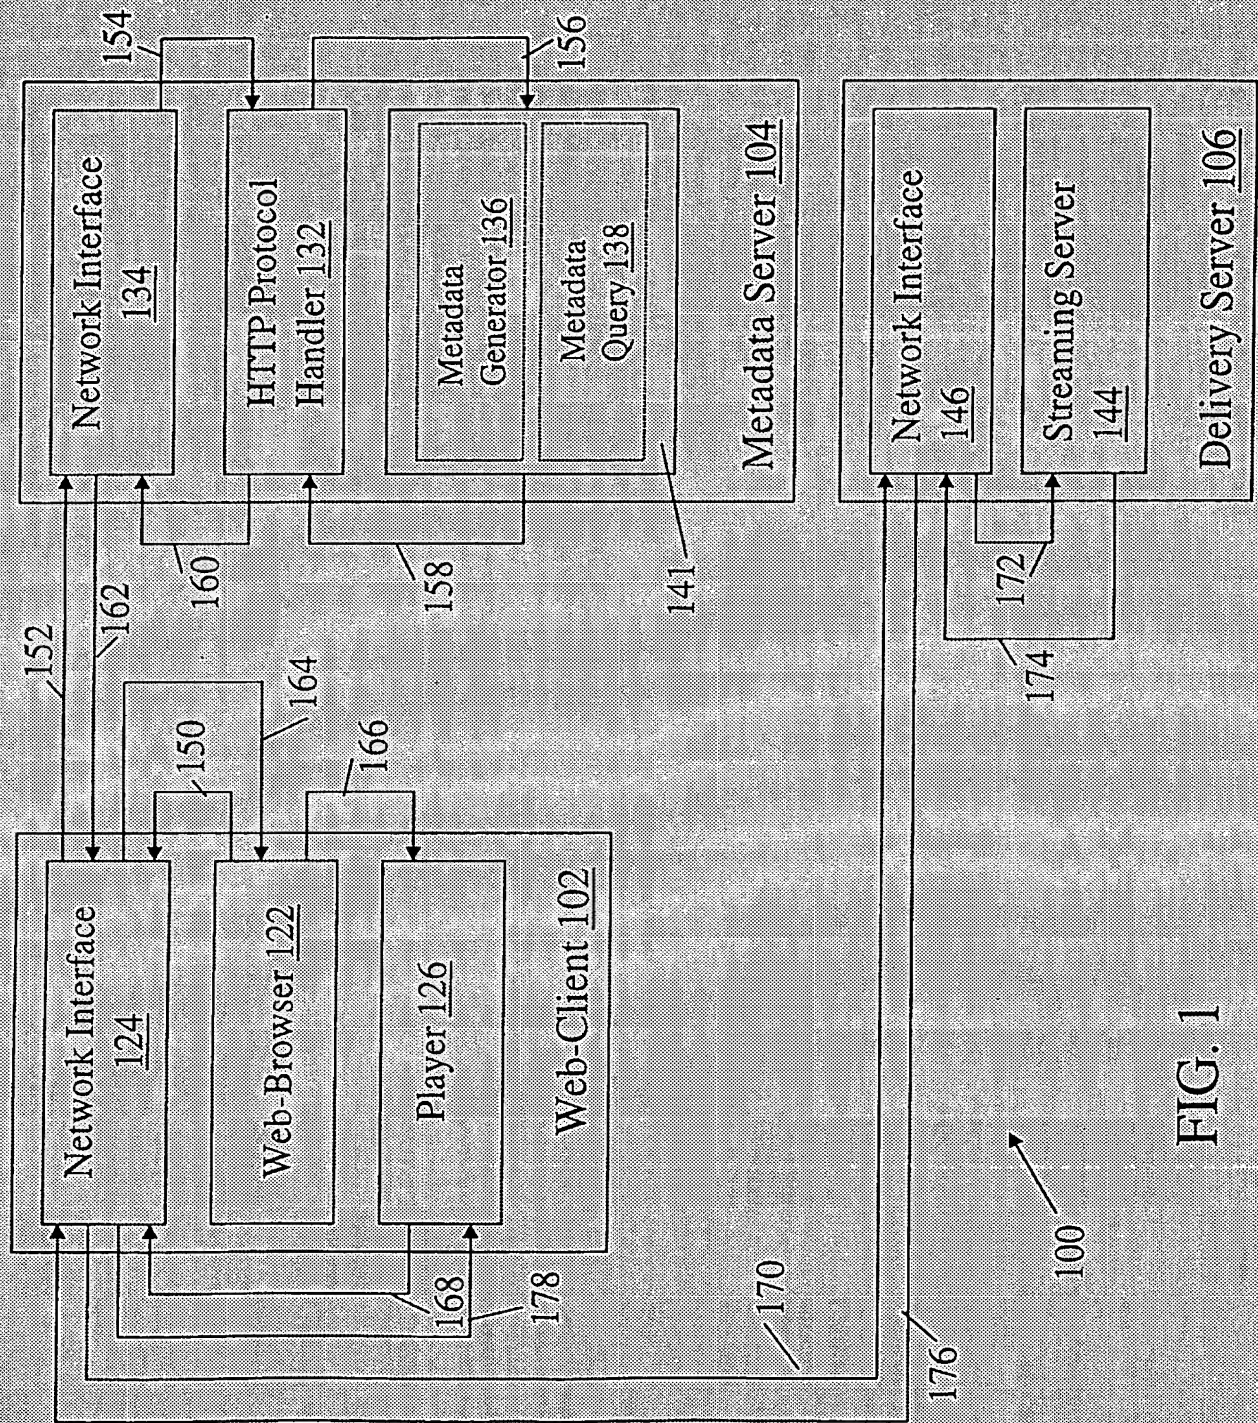


FIG. 1

